

Polias Sincronizadoras AT10

Dentes Trapezoidais

Passo 10 mm (Padronizada)

Para correias de largura 10 mm

Para correias de largura 12 mm


Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	Largura 10			Largura 12			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 AT5	12	6F	38,20	42	6	16	28	15,0	21,0	20,0	17,0	23,0	30,0	AL
14 AT5	14	6F	44,56	48	8	18	32	15,0	21,0	40,0	17,0	23,0	50,0	AL
15 AT5	15	6F	47,75	51	8	18	32	15,0	21,0	60,0	17,0	23,0	70,0	AL
16 AT5	16	6F	50,93	55	8	18	35	15,0	21,0	65,0	17,0	23,0	75,0	AL
18 AT5	18	6F	57,29	61	8	20	40	15,0	21,0	80,0	17,0	23,0	90,0	AL
19 AT5	19	6F	60,48	64	8	22	44	15,0	21,0	90,0	17,0	23,0	100,0	AL
20 AT5	20	6F	63,66	67	8	25	46	15,0	21,0	100,0	17,0	23,0	130,0	AL
24 AT5	24	6F	76,39	80	8	30	58	15,0	21,0	130,0	17,0	23,0	170,0	AL
25 AT5	25	6F	79,58	82	8	32	60	15,0	21,0	170,0	17,0	23,0	200,0	AL
27 AT5	27	6F	85,95	90	8	32	60	15,0	21,0	190,0	17,0	23,0	230,0	AL
30 AT5	30	6F	95,49	99	8	32	60	15,0	21,0	210,0	17,0	23,0	260,0	AL
32 AT5	32	6F	101,86	105	10	32	65	15,0	21,0	240,0	17,0	23,0	290,0	AL
36 AT5	36	6F	114,59	118	10	35	70	15,0	21,0	270,0	17,0	23,0	300,0	AL
40 AT5	40	6F	127,32	131	10	38	80	15,0	21,0	300,0	17,0	23,0	320,0	AL
48 AT5	48	6	152,78	-	16	40	95	15,0	23,0	310,0	17,0	27,0	350,0	AL
60 AT5	60	6	190,98	-	16	45	110	15,0	23,0	350,0	17,0	27,0	390,0	AL
72 AT5	72	6	229,18	-	16	50	120	15,0	23,0	400,0	17,0	27,0	450,0	AL

Para correias de largura 16 mm

Para correias de largura 20 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	Largura 16			Largura 20			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 AT5	12	6F	38,20	42	6	16	28	21,0	31,0	40,0	25,0	35,0	60,0	AL
14 AT5	14	6F	44,56	48	8	18	32	21,0	31,0	70,0	25,0	35,0	90,0	AL
15 AT5	15	6F	47,75	51	8	18	32	21,0	31,0	90,0	25,0	35,0	100,0	AL
16 AT5	16	6F	50,93	55	8	18	35	21,0	31,0	95,0	25,0	35,0	105,0	AL
18 AT5	18	6F	57,29	61	8	20	40	21,0	31,0	105,0	25,0	35,0	110,0	AL
19 AT5	19	6F	60,48	64	8	22	44	21,0	31,0	120,0	25,0	35,0	130,0	AL
20 AT5	20	6F	63,66	67	8	25	46	21,0	31,0	150,0	25,0	35,0	170,0	AL
24 AT5	24	6F	76,39	80	8	30	58	21,0	31,0	200,0	25,0	35,0	210,0	AL
25 AT5	25	6F	79,58	82	8	32	60	21,0	31,0	220,0	25,0	35,0	230,0	AL
27 AT5	27	6F	85,95	90	8	32	60	21,0	31,0	260,0	25,0	35,0	275,0	AL
30 AT5	30	6F	95,49	99	8	32	60	21,0	31,0	300,0	25,0	35,0	310,0	AL
32 AT5	32	6F	101,86	105	10	32	65	21,0	31,0	310,0	25,0	35,0	330,0	AL
36 AT5	36	6F	114,59	118	10	35	70	21,0	31,0	340,0	25,0	35,0	360,0	AL
40 AT5	40	6F	127,32	131	10	38	80	21,0	31,0	370,0	25,0	35,0	390,0	AL
48 AT5	48	6	152,78	-	16	40	95	21,0	31,0	390,0	25,0	35,0	410,0	AL
60 AT5	60	6	190,98	-	16	45	110	21,0	31,0	410,0	25,0	35,0	430,0	AL
72 AT5	72	6	229,18	-	16	50	120	21,0	31,0	600,0	25,0	35,0	630,0	AL

Ex.: 12 AT10 20



Legenda

- 6F = com flange maciça
- 6 = sem flange maciça
- L1 = largura sem cubo
- L2 = largura total com cubo

Para correias de largura 25 mm


Para correias de largura 32 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	Largura 25			Largura 32			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 AT5	12	6F	38,20	42	6	16	16	30,0	40,0	70,0	40,0	50,0	160,0	AL
14 AT5	14	6F	44,56	48	8	18	18	30,0	40,0	100,0	40,0	50,0	160,0	AL
15 AT5	15	6F	47,75	51	8	18	18	30,0	40,0	120,0	40,0	50,0	160,0	AL
16 AT5	16	6F	50,93	55	8	18	18	30,0	40,0	130,0	40,0	50,0	160,0	AL
18 AT5	18	6F	57,29	61	8	20	20	30,0	40,0	140,0	40,0	50,0	160,0	AL
19 AT5	19	6F	60,48	64	8	22	22	30,0	40,0	190,0	40,0	50,0	210,0	AL
20 AT5	20	6F	63,66	67	8	25	25	30,0	40,0	200,0	40,0	50,0	220,0	AL
24 AT5	24	6F	76,39	80	8	30	30	30,0	40,0	220,0	40,0	50,0	230,0	AL
25 AT5	25	6F	79,58	82	8	32	32	30,0	40,0	250,0	40,0	50,0	270,0	AL

27 AT5	27	6F	85,95	90	8	32	32	30,0	40,0	280,0	40,0	50,0	290,0	AL
30 AT5	30	6F	95,49	99	8	32	32	30,0	40,0	315,0	40,0	50,0	320,0	AL
32 AT5	32	6F	101,86	105	10	32	32	30,0	40,0	340,0	40,0	50,0	360,0	AL
36 AT5	36	6F	114,59	118	10	35	35	30,0	40,0	370,0	40,0	50,0	390,0	AL
40 AT5	40	6F	127,32	131	10	38	38	30,0	40,0	400,0	40,0	50,0	410,0	AL
48 AT5	48	6	152,78	-	16	40	40	30,0	40,0	420,0	40,0	50,0	450,0	AL
60 AT5	60	6	190,98	-	16	45	45	30,0	40,0	470,0	40,0	50,0	500,0	AL
72 AT5	72	6	229,18	-	16	50	50	30,0	40,0	670,0	40,0	50,0	700,0	AL

Para correias de largura 50 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	Largura 25			Material
								L1	L2	Peso (g)	
18 AT5	18	6F	57,29	61	8	20	40	56,0	66,0	170,0	AL
19 AT5	19	6F	60,48	64	8	22	44	56,0	66,0	220,0	AL
20 AT5	20	6F	63,66	67	8	25	46	56,0	66,0	240,0	AL
24 AT5	24	6F	76,39	80	8	30	58	56,0	66,0	270,0	AL
25 AT5	25	6F	79,58	82	8	32	60	56,0	66,0	290,0	AL
27 AT5	27	6F	85,95	90	8	32	60	56,0	66,0	310,0	AL
30 AT5	30	6F	95,49	99	8	32	60	56,0	66,0	340,0	AL
32 AT5	32	6F	101,86	105	10	32	65	56,0	66,0	380,0	AL
36 AT5	36	6F	114,59	118	10	35	70	56,0	66,0	405,0	AL
40 AT5	40	6F	127,32	131	10	38	80	56,0	66,0	440,0	AL
48 AT5	48	6	152,78	-	16	40	95	56,0	66,0	490,0	AL
60 AT5	60	6	190,98	-	16	45	110	56,0	66,0	550,0	AL
72 AT5	72	6	229,18	-	16	50	120	56,0	66,0	750,0	AL

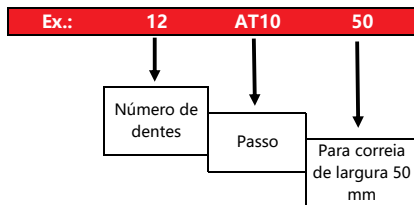

Legenda
6F = com flange maciça
6 = sem flange maciça
L1 = largura sem cubo
L2 = largura total com cubo