

Polias Sincronizadoras T10

Dentes Trapezoidais

Passo 10 mm (Padronizada)

Para correias de largura 10 mm

Para correias de largura 12 mm


Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	10			12			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 T10	12	6F	38,20	42	6	16	28	15,0	21,0	20,0	17,0	23,0	30,0	AL
14 T10	14	6F	44,56	48	8	18	32	15,0	21,0	40,0	17,0	23,0	50,0	AL
15 T10	15	6F	47,75	51	8	18	32	15,0	21,0	60,0	17,0	23,0	70,0	AL
16 T10	16	6F	50,93	55	8	18	35	15,0	21,0	65,0	17,0	23,0	75,0	AL
18 T10	18	6F	57,29	61	8	20	40	15,0	21,0	80,0	17,0	23,0	90,0	AL
19 T10	19	6F	60,48	64	8	22	44	15,0	21,0	90,0	17,0	23,0	100,0	AL
20 T10	20	6F	63,66	67	8	25	46	15,0	21,0	100,0	17,0	23,0	130,0	AL
24 T10	24	6F	76,39	80	8	30	58	15,0	21,0	130,0	17,0	23,0	170,0	AL
25 T10	25	6F	79,58	82	8	32	60	15,0	21,0	170,0	17,0	23,0	200,0	AL
27 T10	27	6F	85,95	90	8	32	60	15,0	21,0	190,0	17,0	23,0	230,0	AL
30 T10	30	6F	95,49	99	8	32	60	15,0	21,0	210,0	17,0	23,0	260,0	AL
32 T10	32	6F	101,86	105	10	32	65	15,0	21,0	240,0	17,0	23,0	290,0	AL
36 T10	36	6F	114,59	118	10	35	70	15,0	21,0	270,0	17,0	23,0	300,0	AL
40 T10	40	6F	127,32	131	10	38	80	15,0	21,0	300,0	17,0	23,0	320,0	AL
48 T10	48	6	152,78	-	16	40	95	15,0	23,0	310,0	17,0	27,0	350,0	AL
60 T10	60	6	190,98	-	16	45	110	15,0	23,0	350,0	17,0	27,0	390,0	AL
72 T10	72	6	229,18	-	16	50	120	15,0	23,0	400,0	17,0	27,0	450,0	AL

Para correias de largura 16 mm

Para correias de largura 20 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	16			20			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 T10	12	6F	38,20	42	6	16	28	21,0	31,0	40,0	25,0	35,0	60,0	AL
14 T10	14	6F	44,56	48	8	18	32	21,0	31,0	70,0	25,0	35,0	90,0	AL
15 T10	15	6F	47,75	51	8	18	32	21,0	31,0	90,0	25,0	35,0	100,0	AL
16 T10	16	6F	50,93	55	8	18	35	21,0	31,0	95,0	25,0	35,0	105,0	AL
18 T10	18	6F	57,29	61	8	20	40	21,0	31,0	105,0	25,0	35,0	110,0	AL
19 T10	19	6F	60,48	64	8	22	44	21,0	31,0	120,0	25,0	35,0	130,0	AL
20 T10	20	6F	63,66	67	8	25	46	21,0	31,0	150,0	25,0	35,0	170,0	AL
24 T10	24	6F	76,39	80	8	30	58	21,0	31,0	200,0	25,0	35,0	210,0	AL
25 T10	25	6F	79,58	82	8	32	60	21,0	31,0	220,0	25,0	35,0	230,0	AL
27 T10	27	6F	85,95	90	8	32	60	21,0	31,0	260,0	25,0	35,0	275,0	AL
30 T10	30	6F	95,49	99	8	32	60	21,0	31,0	300,0	25,0	35,0	310,0	AL
32 T10	32	6F	101,86	105	10	32	65	21,0	31,0	310,0	25,0	35,0	330,0	AL
36 T10	36	6F	114,59	118	10	35	70	21,0	31,0	340,0	25,0	35,0	360,0	AL
40 T10	40	6F	127,32	131	10	38	80	21,0	31,0	370,0	25,0	35,0	390,0	AL
48 T10	48	6	152,78	-	16	40	95	21,0	31,0	390,0	25,0	35,0	410,0	AL
60 T10	60	6	190,98	-	16	45	110	21,0	31,0	410,0	25,0	35,0	430,0	AL
72 T10	70	6	229,18	-	16	50	120	21,0	31,0	600,0	25,0	35,0	630,0	AL

Ex.: 12 T10 12

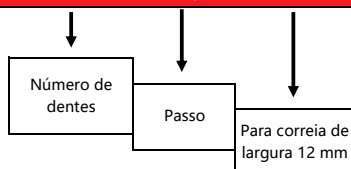

Legenda

6F = com flange maciça

6 = sem flange maciça

L1 = largura sem cubo

L2 = largura total com cubo

Para correias de largura 25 mm


Para correias de largura 32 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Mín.	Ø P Furo Máx.	Ø C Cubo	16			20			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
12 T10	12	6F	38,20	42	6	16	28	30,0	40,0	70,0	40,0	50,0	160,0	AL
14 T10	14	6F	44,56	48	8	18	32	30,0	40,0	100,0	40,0	50,0	160,0	AL
15 T10	15	6F	47,75	51	8	18	32	30,0	40,0	120,0	40,0	50,0	160,0	AL
16 T10	16	6F	50,93	55	8	18	35	30,0	40,0	130,0	40,0	50,0	160,0	AL
18 T10	18	6F	57,29	61	8	20	40	30,0	40,0	140,0	40,0	50,0	160,0	AL
19 T10	19	6F	60,48	64	8	22	44	30,0	40,0	190,0	40,0	50,0	210,0	AL
20 T10	20	6F	63,66	67	8	25	46	30,0	40,0	200,0	40,0	50,0	220,0	AL
24 T10	24	6F	76,39	80	8	30	58	30,0	40,0	220,0	40,0	50,0	230,0	AL
25 T10	25	6F	79,58	82	8	32	60	30,0	40,0	250,0	40,0	50,0	270,0	AL
27 T10	27	6F	85,95	90	8	32	60	30,0	40,0	280,0	40,0	50,0	290,0	AL

30 T10	30	6F	95,49	99	8	32	60	30,0	40,0	315,0	40,0	50,0	320,0	AL
32 T10	32	6F	101,86	105	10	32	65	30,0	40,0	340,0	40,0	50,0	360,0	AL
36 T10	36	6F	114,59	118	10	35	70	30,0	40,0	370,0	40,0	50,0	390,0	AL
40 T10	40	6F	127,32	131	10	38	80	30,0	40,0	400,0	40,0	50,0	410,0	AL
48 T10	48	6	152,78	-	16	40	95	30,0	40,0	420,0	40,0	50,0	450,0	AL
60 T10	60	6	190,98	-	16	45	110	30,0	40,0	470,0	40,0	50,0	500,0	AL
72 T10	70	6	229,18	-	16	50	120	30,0	40,0	670,0	40,0	50,0	700,0	AL

Para correias de largura 50 mm

Código	Número de Dentes	Tipo polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Min.	Ø P Furo Máx.	Ø C Cubo	8		Peso (g)	Material
								L1	L2		
18 T10	10	6F	57,29	61	8	20	40	56,0	66,0	170,0	AL
19 T10	12	6F	60,48	64	8	22	44	56,0	66,0	220,0	AL
20 T10	14	6F	63,66	67	8	25	46	56,0	66,0	240,0	AL
24 T10	15	6F	76,39	80	8	30	58	56,0	66,0	270,0	AL
25 T10	16	6F	79,58	82	8	32	60	56,0	66,0	290,0	AL
27 T10	18	6F	85,95	90	8	32	60	56,0	66,0	310,0	AL
30 T10	19	6F	95,49	99	8	32	60	56,0	66,0	340,0	AL
32 T10	20	6F	101,86	105	10	32	65	56,0	66,0	380,0	AL
36 T10	24	6F	114,59	118	10	35	70	56,0	66,0	405,0	AL
40 T10	25	6F	127,32	131	10	38	80	56,0	66,0	440,0	AL
48 T10	27	6	152,78	-	16	40	95	56,0	66,0	490,0	AL
60 T10	30	6	190,98	-	16	45	110	56,0	66,0	550,0	AL
72 T10	32	6	229,18	-	16	50	120	56,0	66,0	750,0	AL

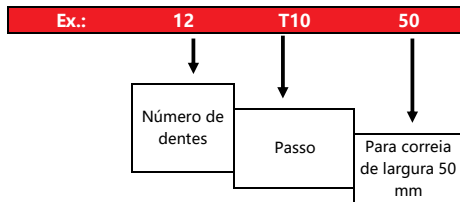

Legenda
6F = com flange maciça
6 = sem flange maciça
L1 = largura sem cubo
L2 = largura total com cubo